



RHEEM ELECTRIC STORAGE WATER HEATERS



ELECTRIC

25L
-
400L

DELIVERY

7 or 10
YEAR

CYLINDER
WARRANTY^{1,2}

Indoor/
Outdoor¹

INSTALLATION



DUAL
HANDED³



FEATURES

- Fast, easy like-for-like replacement
- Feature dual handed inlet and outlet fittings
- 25L, 50L, 80L and 125L models provide T&PR fittings on both sides of the tank for even easier installation
- Reliable vitreous enamel lining
- Small diameter – 400mm (25L & 50L), 480mm (80L & 125L)
- Twin Element models provide that little bit extra when you need it (160L - 400L)
- Models with a capacity of 125L or more suit connection to concessional (off peak) tariffs
- 10 year cylinder warranty¹, including 3 years labour on cylinder on 250L to 400L models
- 7 year cylinder warranty², including 3 years labour on cylinder on 25L to 160L models

WHY CHOOSE RHEEM



- Backed by over 70 years of Rheem water heating experience
- Capacities to suit every family size and hot water requirement
- Mains pressure water delivery for water that comes on steady, hot and strong!
- Full technical support through Rheem's National Service Network





RHEEM ELECTRIC STORAGE WATER HEATERS

| MODEL | | 25L | 50L | 80L | 125L | 160L | 250L | 315L | 400L |
|--|---------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| Rheem Single Element | | 191025 191025/P† | 191050 191050/P† | 191080 | 191125 | 191160 | 491250 | 491315 | 491400 |
| Rheem Twin Element | | | | | | 192160 ³ | 492250 ⁴ | 492315 ⁴ | 492400 ⁴ |
| Hot Water Delivery | Litres | 25 | 50 | 80 | 125 | 160 | 250 | 315 | 400 |
| Boost Capacity (twin element models) | Litres | - | - | - | - | 45 | 50 | 50 | 90 |
| kW Rating | 1.8 | - | ✓ | ✓ | ✓ | ✓ | ✓ | - | - |
| | 2.4 | ✓ | ✓ | - | - | ✓ | - | - | - |
| | 3.6 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | 4.8 | - | - | - | - | - | ✓ | ✓ | ✓ |
| Relief Valve Setting | kPa | 1400 | 1400 | 1400 | 1400 | 1400 | 1000 | 1000 | 1000 |
| Expansion Control Valve (kPa) | kPa | 1200 | 1200 | 1200 | 1200 | 1200 | 850 | 850 | 850 |
| Max Water Supply Pressure: | | | | | | | | | |
| with ECV (kPa) | kPa | 960 | 960 | 960 | 960 | 960 | 680 | 680 | 680 |
| without ECV (kPa) | kPa | 1120 | 1120 | 1120 | 1120 | 1120 | 800 | 800 | 800 |
| Water Connections | | RP ³ / ₄ | RP ³ / ₄ | RP ³ / ₄ | RP ³ / ₄ | RP ³ / ₄ | RP ³ / ₄ | RP ³ / ₄ | RP ³ / ₄ |
| Dimensions | | | | | | | | | |
| A | mm | 430 | 695 | 945 | 1340 | 1610 | 1395 | 1640 | 1840 |
| B | mm | 400 | 400 | 480 | 480 | 480 | 640 | 640 | 690 |
| C | mm | 436 | 436 | 515 | 515 | 515 | 680 | 680 | 730 |
| D | mm | 106 | 397 | 702 | 1102 | 1332 | 1117 | 1317 | 1479 |
| E | mm | 142 | 142 | 64 | 64 | 104 | 73 | 113 | 121 |
| F | mm | 60 | 60 | 66 | 66 | 66 | 103 | 103 | 105 |
| G - Twin element models | mm | - | - | - | - | 1081 | 988 | 1228 | 1323 |
| H | degrees | 26 | 26 | 24 | 24 | 23 | 32 | 32 | 30 |
| J | degrees | 64 | 59 | 60 | 60 | 58 | 88 | 88 | 83 |
| M | degrees | - | - | - | - | 58 | 92 | 92 | 97 |
| Approx. Weight (Empty) | kg | 19 | 26 | 36 | 49 | 55 | 76 | 97 | 118 |
| Accessories | | | | | | | | | |
| Wall Mounting Bracket | | | | | | | | | |
| Part No: 299120 (25L - 80L model only) | | | | | | | | | |

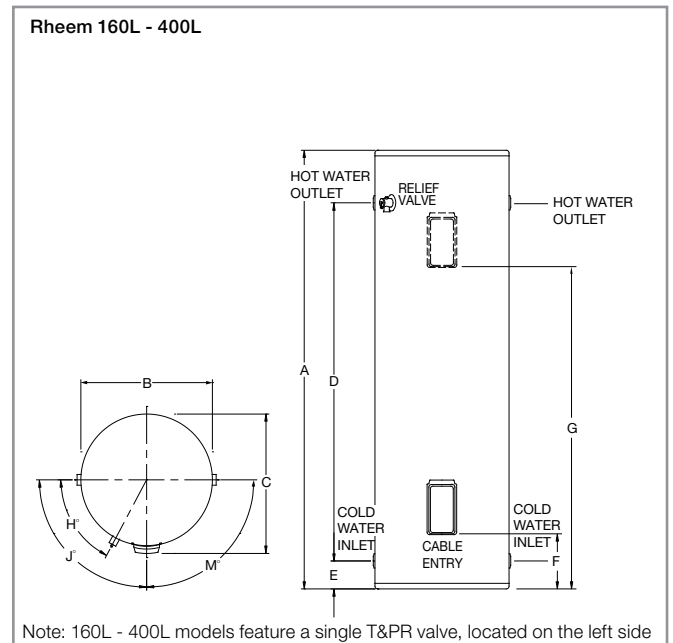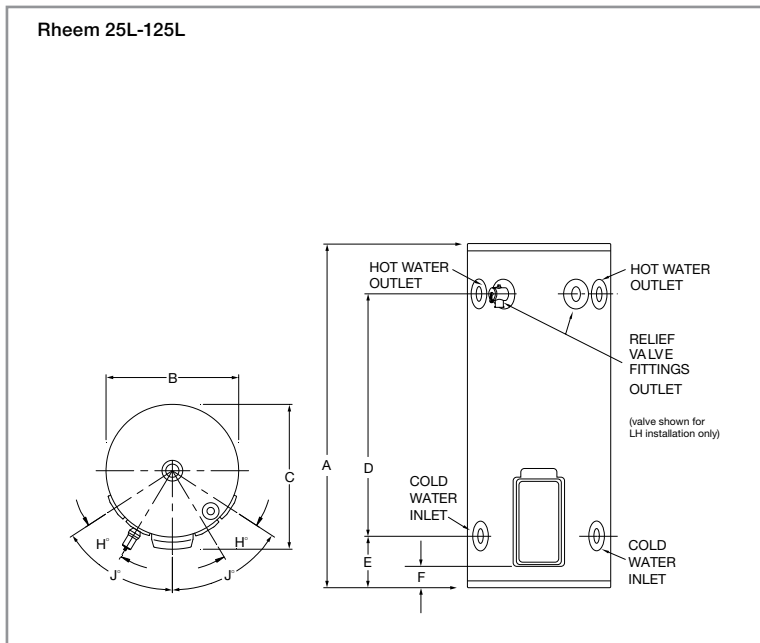

*Plug and lead model available in 2.4kW Rating only, suitable for indoor installation only

- ¹ Warranty: (250L - 400L) 10 Years on Cylinder, 3 Years Labour on Cylinder, 1 Year Parts & Labour warranty on all other components for Domestic (non-Commercial) installations. Conditions apply. See the Rheem warranty set out in the Owner's Guide & Installation Instructions or view at www.rheem.com.au/warranty
- ² Warranty: (25L - 160L) 7 Years on Cylinder, 3 Years Labour on Cylinder, 1 Year Parts & Labour warranty on all other components for Domestic (non-Commercial) installations. 7 year warranty applies to product manufactured after 1/1/2012. Conditions apply. See the Rheem warranty set out in the Owner's Guide & Installation Instructions or view at www.rheem.com.au/warranty
- ³ Available in 3.6/3.0 element rating only
- ⁴ Available in 3.6 & 4.8 element rating only
- ⁵ Registered Trademark of Rheem Australia Pty Ltd. Materials and data are subject to change without notice.

Rheem Australia Pty Ltd.
 1 Alan Street, Rydalmere, New South Wales 2116, Australia
 PO Box 7508 Silverwater NSW 2128, Australia.
www.rheem.com.au

